


# HOME COMFORTE<sub>co</sub> IQ




### High-density filter

Compared with ordinary dust filter, high-density filter can effectively remove the dust and pollutants.

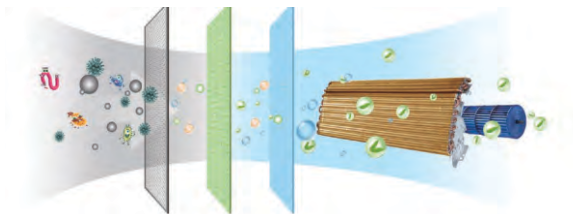


### Longer distance of air supply

The air conditioning duct system is optimized to achieve long-distance air supply, and the air supply distance can reach 18 meters.

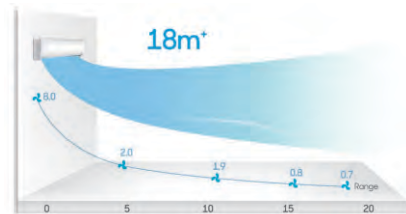

### Strong air supply

Optimized air duct design and large-diameter cross-flow fan can further deliver the wind and blow the wind to every corner of the room.

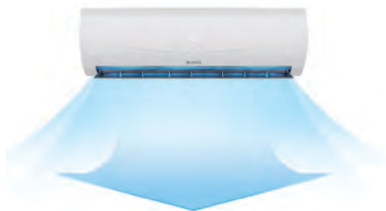


### Power failure memory

When the air conditioner suddenly loses power or powers down, once the power supply is restored, the machine will run according to the mode and settings before the shutdown.



### Golden Fin

Improves heat exchange efficiency and withstands salty air, rain and other corrosive element.

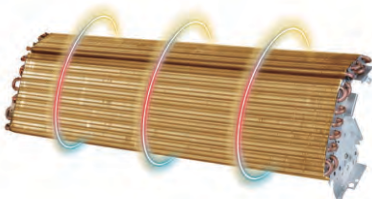

# AIR CONDITIONERS



- \*Global toppest compressor
- \*Super quiet running
- \*3D Air Delivery
- \*Auto Restart
- \*Golden Fin



PRODUCT SPECIFICATION SHEET							
Model				IQ-H09U4/173R1-ZA	IQ-H12U4/173R1-ZA	IQ-H18U4/173R1-ZA	IQ-H24U4/173R1-ZA
Nameplate	Rated Capacity	Cooling	W	2600	3200	5100	5800
		Heating	W	2700	3400	5200	5800
		Dehumidifying	Kg/H	/	/	/	/
	Power Input	Cooling	W	850	1045	1670	1900
		Heating	W	790	1060	1650	1800
	Current Input	Cooling	A	3.8	4.6	7.4	8.2
		Heating	A	3.5	4.4	7.3	7.8
	EER Cooling		W/W	3.05	3.06	3.05	3.05
	COP Heating		W/W	3.41	3.4	3.15	3.22
	Power Supply Source		V/Ph/Hz	220-240V~50Hz	220-240V~50Hz	220-240V~50Hz	220-240V~50Hz
	Refrigerant			R410A	R410A	R410A	R410A
	HP.PS		Mpa	4.2	4.2	4.2	4.2
	LP.PS		Mpa	1.2	1.2	1.2	1.2
	Indoor Max Operating Pressure of Heat Exchanger		Mpa	4.2	4.2	4.2	4.2
Indoor Noise		dB(A)	29-40	32-43	36-46	36-48	
Outdoor Noise		dB(A)	52	54	54	56	
Copper Pipe	Liquid side/ Gas side/Length		mm	φ6.35+φ9.52×3000	φ6.35+φ9.52×3000	φ6.35+φ12.7×3000	φ6.35+φ12.7×3000
Indoor Unit	Weight	N.W/G.W	Kg	10/12	10/12	14/17	16/20
	Dimension	Net Dimension (WidthxDepthxHeight)	mm	780x276x202	780x276x202	950x313x240	1055x313x240
		Packing Dimension (WidthxDepthxHeight)	mm	860x366x280	860x366x280	1045x403x330	1193x411x347
Outdoor Unit	Weight	N.W/G.W	Kg	25/29	28/30	42/49	42/49
	Dimension	Net Dimension (WidthxDepthxHeight)	mm	700x225x500	715x235x540	850x295x605	850x295x605
		Packing Dimension (WidthxDepthxHeight)	mm	830x320x555	851x335x600	995x415x690	995x415x690